OAS 25 OAS 45

It's more than a generator. It's Predictable Power.







ATLAS COPCO OAS 25 & OAS 45 COMPACT & POWERFUL

Need Power? The Atlas Copco QAS 25 and QAS 45 packs an impressive amount of power into a heavy duty, weather proof, sound attenuated and compact enclosure. Available in either a skid mount or trailer mounted configuration, it is adaptable to whatever your job site demands.

It combines the robustness and reliability you need with innovative features for additional safety and ease of use.

Performance	
Service Efficiency	Sec.
Resale value	\$
Safety	t.
Ease of use	ĥ

Atlas Con

QAS 2

EASY TO USE AND MAINTAIN

SIMPLIFIED MAINTENANCE

Single Side servicing through large service doors providing quick access to components, including the alternator, engine and electrical systems.

Drains for water and oil are easy to reach and can be directed outside of the containment basin for draining. Coupled with extended life filters for 500 hour service intervals, make this generator the workhorse of your fleet.

EASY TO MOVE 🐁 🁘

Integrated single point lifting and different undercarriage types including; heavy duty skid with forklift pockets or a single axle trailer are available to fit a wide range of applications.

RELIABILITY COMES STANDARD

RELIABLE PROVEN ENGINE 🛛 📃 🕵

The Isuzu 4LE platform is based on the tested iT4 version with the addition of a DOC. A DOC only solution simplifies operation and maintenance with no DEF (Diesel Exhaust Fluid) or DPF (Diesel Particulate Filter) to contend with. The QAS 25 and QAS 45 also come with a standard 5 year limited engine warranty through Isuzu.

LEROY SOMER - AREP ALTERNATOR 📖 🦠 🛸

Heavy duty marine impregnated alternator with multi-voltage capabilities. The AREP excitation system offers superior motor starting capabilities, with 300% over-current capacity for demanding applications.



EASY OPERATION

ALWAYS RELIABLE 🛛 🛽 💼 🔓

A large integrated fuel cell is standard equipment, allowing the longest run time in its class. The QAS 25 boasts up to 45 hours of run time per tank @ 75% load, while the QAS 45 will run for 30 hours respectively on a single tank of diesel.

Fewer diesel fills creates a higher up-time and ultimately lowers your cost of ownership with less fuel fills per shift. All fluids are 110% contained inside the heavy duty base frame.

External fuel connections are available as an option should you want to extend the running time further.

USER FRIENDLY CONTROLS

The QAS 25 & QAS 45 Tier 4 range comes standard with a Deep Sea 4510 controller. The controller is user friendly with a back lit display showing all critical machine information, which can be viewed through a rugged Plexiglas panel in the door.

Key features of the controller include; Remote Start/ Stop, Generator Voltages (ph-N, ph-ph), Frequency, Current (A), Total Load (kW, kVA), Power Factor, Engine Speed, Oil Pressure, Coolant Temp, Battery Voltage, Run Time, Engine Maintenance Schedule, Fuel Level, and many more.

All functions are set with warning and showdown safety limits, that can easily be customized by the user.

SUPERIOR PERFORMANCE

COMMON PLATFORMS

Both models are the same platform with a common engine, cubicle and enclosure. This keeps most parts and service packs the same between both models.


🦎 S

HEAVY-DUTY ENCLOSURE

All QAS model generators are built tough with heavy gauge, powder coated galvannealed steel. The base frame is built with a rigid construction and incorporates 110% fluid containment as standard on all machines. The superior fit and finish on the enclosure provides a sound attenuation, as well as weather-proofing and protection from the elements.

Technical data

lechnical data			
Model		QAS 25 ID	QAS 45 ID
Rated Prime Power 3Ø	kW / kVA	20/25	36/45
Rated Stand-by Power 3Ø	kW / kVA	22/28	40/50
Voltage Selection 3Ø	V	208 / 240 / 480	
Amp @ 480 volts	А	30	54
Amp @ 240 volts	А	60	108
Amp @ 208 volts	А	69	125
Rated Prime Power 1Ø	kVA	16	27
Voltage Selection 1Ø	V	120 / 240	
Amp @ 240 volts	А	67	104
Amp @ 120 volts	А	67 x 2	104 x 2
Frequency	Hz	60	60
Sound Pressure @ 23 ft. (7m) @ 75% load	dBA	67	66
Convenience Receptacles		2 x NEMA 5-20R & 2 x 125/250V 50A CS6364	
Alternator - Leroy Somer			
Model		LSA 40 M5	LSA 42.3 L9
Degree of Protection / Insulation Glass		Н	
Excitation		AREP	
Engine - Isuzu			
Model		4LE2T	4LE2X
Displacement	L	2.18	
Cylinders	#	4	
Tier	US EPA	Tier 4 Final	
Engine Exhaust After Treatment		DOC	
Prime Horsepower	HP	32.5	59
Rated Speed	RPM	1800	
Engine Control		ECU	
Fuel Tank Capacity	Gal (L)	72.5 (274)	
Fuel Consumption @ 75% load	Gal/hr (L/Hr)	1.4 (5.3)	2.15 (8.1)
Fuel Autonomy @ 75% load	Hr	45	30
Dimensions (L x W x H) & Weight			
Trailer	Inches	129x54x66	
Weight (w/Trailer wet)	lbs (kg)	2,395 (1,086)	2,625 (1,191)
Skid (w/ Forklift pockets)	Inches	75x34x55	
Weight (skid wet)	lbs (kg)	2,310 (1,048)	2,340 (1,061)
÷ · · ·	, ,,		

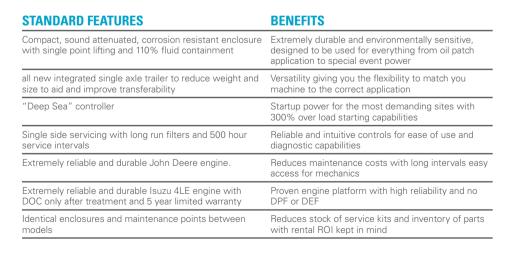



Generator Features and Options Included		
Multi-Voltage Selector switch	٠	
Remote Start / Stop	•	
Digital Control Systems	٠	
110% Fluid Containment	•	
ECU Controlled	•	
Single Side Service (500 Hour Interval)	•	
Single Breaker Design	•	
Single Axle Trailer	0	
Skid Mounted (W/ Forklift Pockets	0	
Battery Charger	0	
Coolant Heater	0	
Ball Coupling	0	
External Fuel Connections	0	
Standard Option O		

PREDICTABLE POWER

Atlas Copco Predictable power brings customers in the on-site generator and power generations business peace of mind with solutions that combine low cost of ownership, reliable performance and risk-free operation. Predictable Power is our core value and the guiding principle for how we design, test, build, commission and service our generators.



Photos and illustrations contained herein might depict products with optional and/ or extra components which are not included with the standard version of the product and, therefore, are not included in a purchase of such product unless the customer specifically purchases such optional/extra components. We reserve the right to change the specifications and design of products described in this literature without notice. Not all products are available in all markets.

